

Jandy® Watermatic Automated Granular Dichlor Feeder

*Affordable automation for commercial
and residential pools, spas and water features*

The Jandy Watermatic D-6L is a Dichlor Chlorine Feeder with an ORP pH controller that assures ideal sanitizing levels using granular dichlor. pH control is handled with a liquid peristaltic pump for muriatic acid. The system will adjust chlorination levels automatically in response to a variety of changing conditions that can make pool and spa care challenging. Exact dosing insures bather protection and reduces costs.



Benefits

- Clean, clear, safe swimming pool water seven days a week
- Ideal for commercial spas, keeps up with demand
- Efficient use of chemicals
- Easy to install, operate and maintain
- Feeder NSF listed, Health Dept. approved for commercial applications
- ORP and pH control
- Toll-free technical assistance and nationwide field support from Zodiac

The Dichlor Advantage

- pH neutral – makes water balance easy and safe for pool equipment
- Concentrated – uses less chemicals more efficiently
- Dissolves quickly with no residue
- Safe for vinyl pools
- No scaling or cloudy water
- Safe and easy to transport, longer storage life
- Safe for all pool/spa finishes, including vinyl



2620 Commerce Way, Vista, CA 92081-8438
760-599-9600 • 1-800-822-7933
www.jandy.com

Jandy Watermatic D-6L



Included in System

- C2000 ORP/pH Controller with Flow Cell, flow switch and sensors included
- G-1000 Dichlor Feeder (plumbing hardware included)
- Electrical wiring and special fittings (must conform to local code)

Note: The Flow Cell has an internal flow switch that plugs into the C2000 controller.

How the System Works

The **Jandy Watermatic G-1000** with the C2000 Controller makes regulating sanitizer easy. The sensor probes in the Flow Cell constantly read the pool's chlorine level. When needed, the system adds the dichlor, to keep your pool sparkling clean at all times.

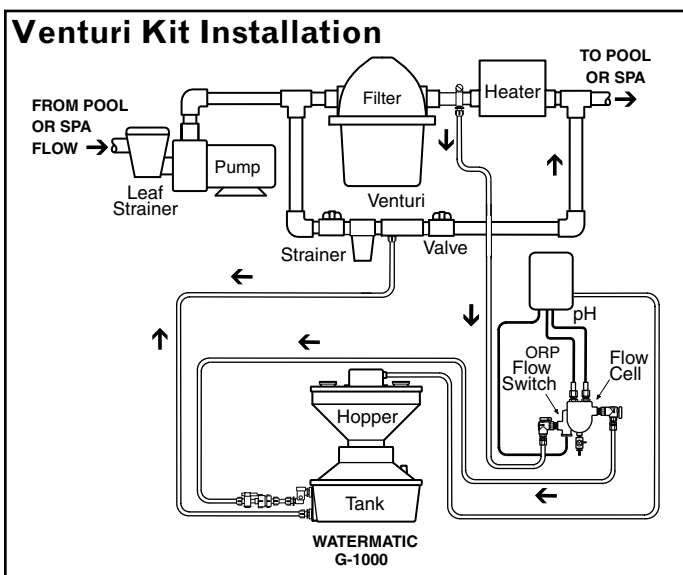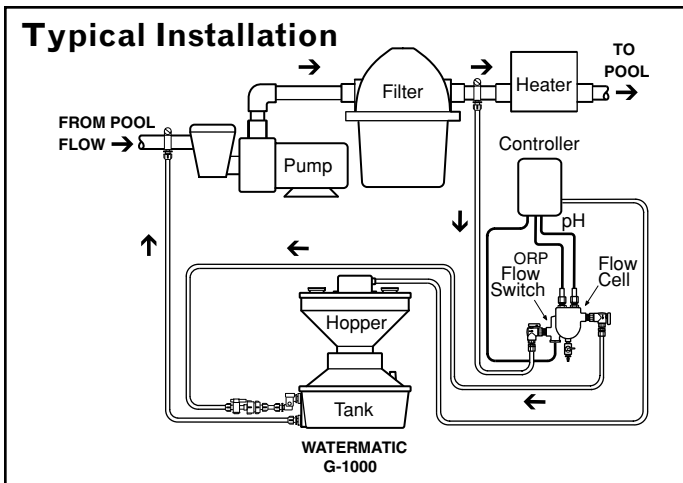

Specifications

FEEDER:

- Power: 120VAC
- Diameter: 12.5"
- Height: 22"
- Weight (empty): 12 lbs
- Tubing Size (O.D.): 3/8"
- Hopper Capacity: 10 lbs
- Hopper Capacity: 45 lbs with extension bottles
- Maximum Output: 54 lbs/day NSF listed
117 lbs/day possible

Feeder designed to be installed above the water level of the pool.

Note: A check valve, Venturi Kit, or booster pump may be required for below water level installations.

Controller

- ORP Control: 200-900mV
- pH Read/Control: 7.0-8.2
- ORP Sensor: Gold-tipped w/10' cable
- Readout: Graphic LCD, menu driven
- Feed Rate: Feed adjustable with selector dial and measuring cones
- Electrical Input: 120VAC
- Electrical Output: 120VAC
- Output Rating: 5 amps, output fused with 1.5 amp slo-blow fuse
- Alarm: Alert display. Optional audio alarm
- Enclosure: 5.5" x 9.5" x 3.75"

Optional Equipment

- 9-720 Feeder Stand
- Venturi Kits